PS116

premier series shower set





OPERATING SPECIFICATIONS

FEATURES

Solid Brass 3-Outlets

INCLUDES

F903B-58TK F907-28 F907-60 F908-4

OPERATING PRESSURE

Minimum: 15 psi Maximum: 75 psi Above 90psi it may be necessary to install a pressure reducer

OPERATING TEMPERATURE Maximum: 176°

FLOW CAPACITY

Hand Shower: 1.8 USGPM Shower Head: 1.8 USGPM Tub Filler: 6.0 USGPM




PS116

premier series shower set

PRODUCT DIMENSIONS

for trim kit

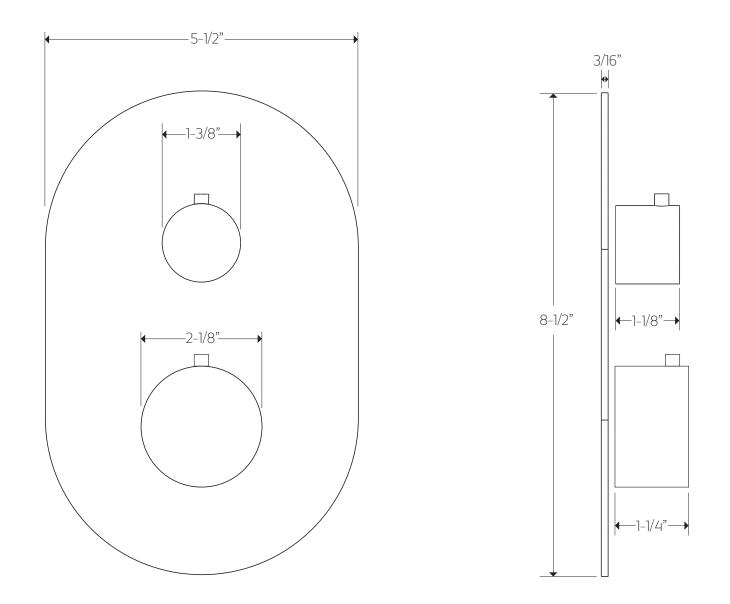


PS116

premier series shower set

PRODUCT DIMENSIONS

for shower head

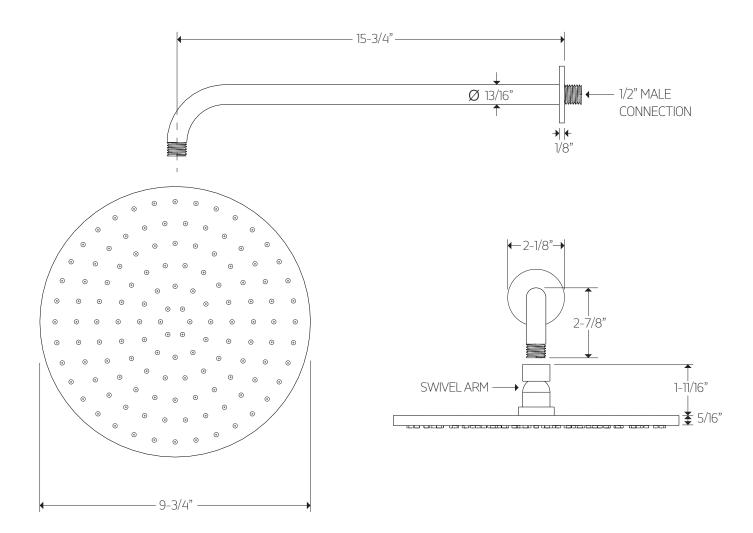


All technical and pricing information is subject to change without prior notice. To confirm accuracy check with Artos customer service.

PS116

premier series shower set

PRODUCT DIMENSIONS

for hand shower

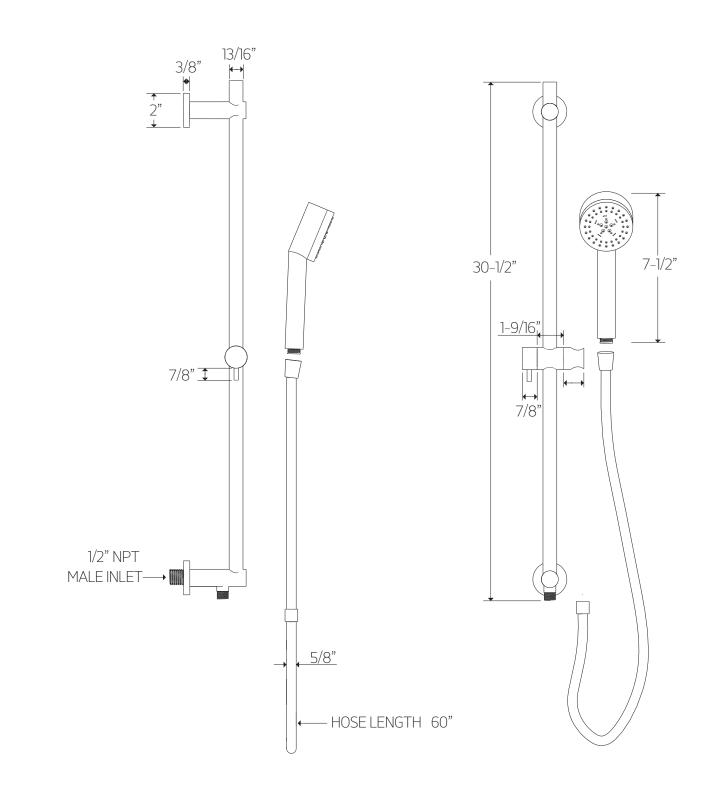



PS116

premier series shower set

PRODUCT DIMENSIONS

for tub filler

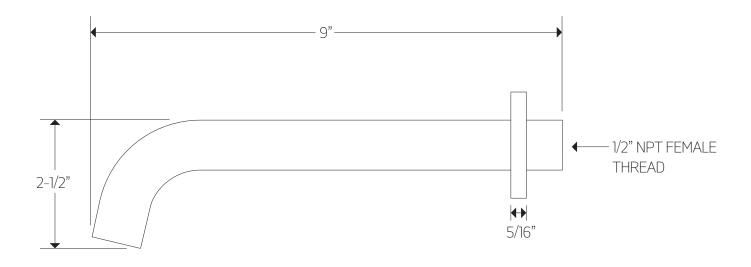



©083122 ed. All technical and pricing information is subject to change without prior notice. To confirm accuracy check with Artos customer service.