

# artos<sup>®</sup>

## PS143

premier series shower set

## OPERATING SPECIFICATIONS



### FEATURES

Solid Brass  
3-Outlets

### INCLUDES

F903B-59TK  
F402-10  
F907-50

### OPERATING PRESSURE

Minimum: 15 psi  
Maximum: 75 psi  
Above 90psi it may be necessary to install a pressure reducer

### OPERATING TEMPERATURE

Maximum: 176°

### FLOW CAPACITY

Tub Filler: 6.1 USGPM  
Shower Head: 1.8 USGPM  
Body Jet: 1.0 USGPM

### APPROVAL





# artos<sup>®</sup>

PS143

## PRODUCT DIMENSIONS

premier series shower set

for trim kit

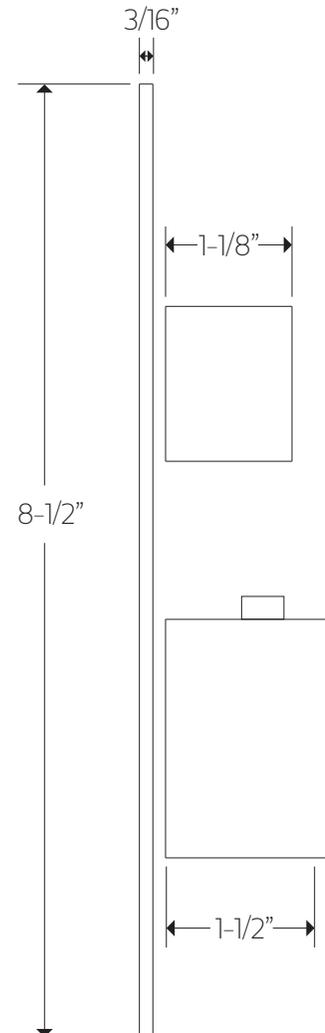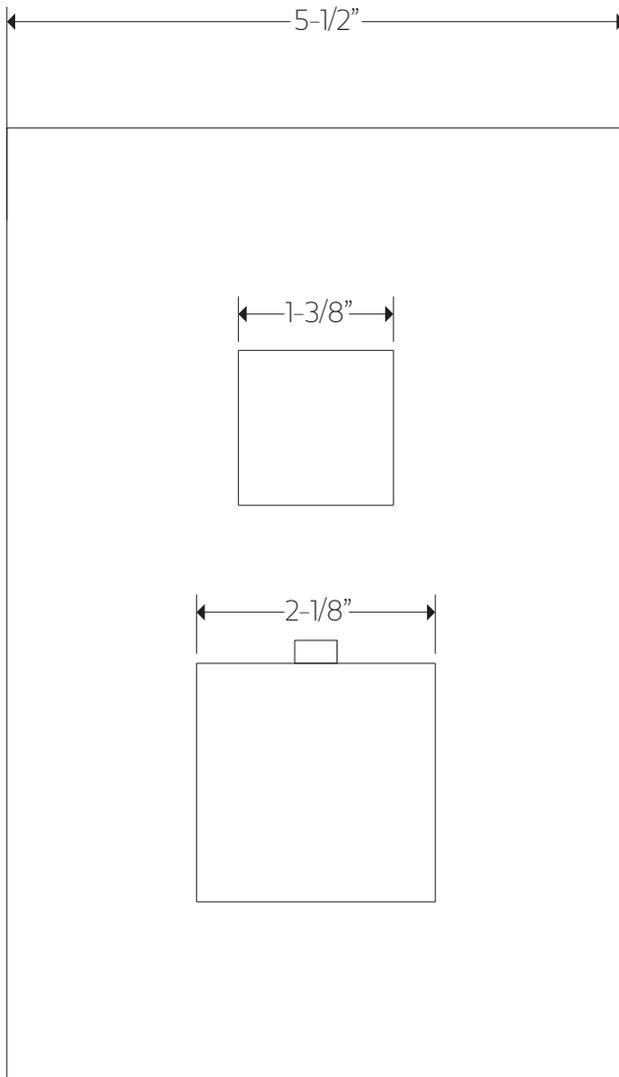


# artos<sup>®</sup>

## PS143

premier series shower set

### PRODUCT DIMENSIONS

for shower head

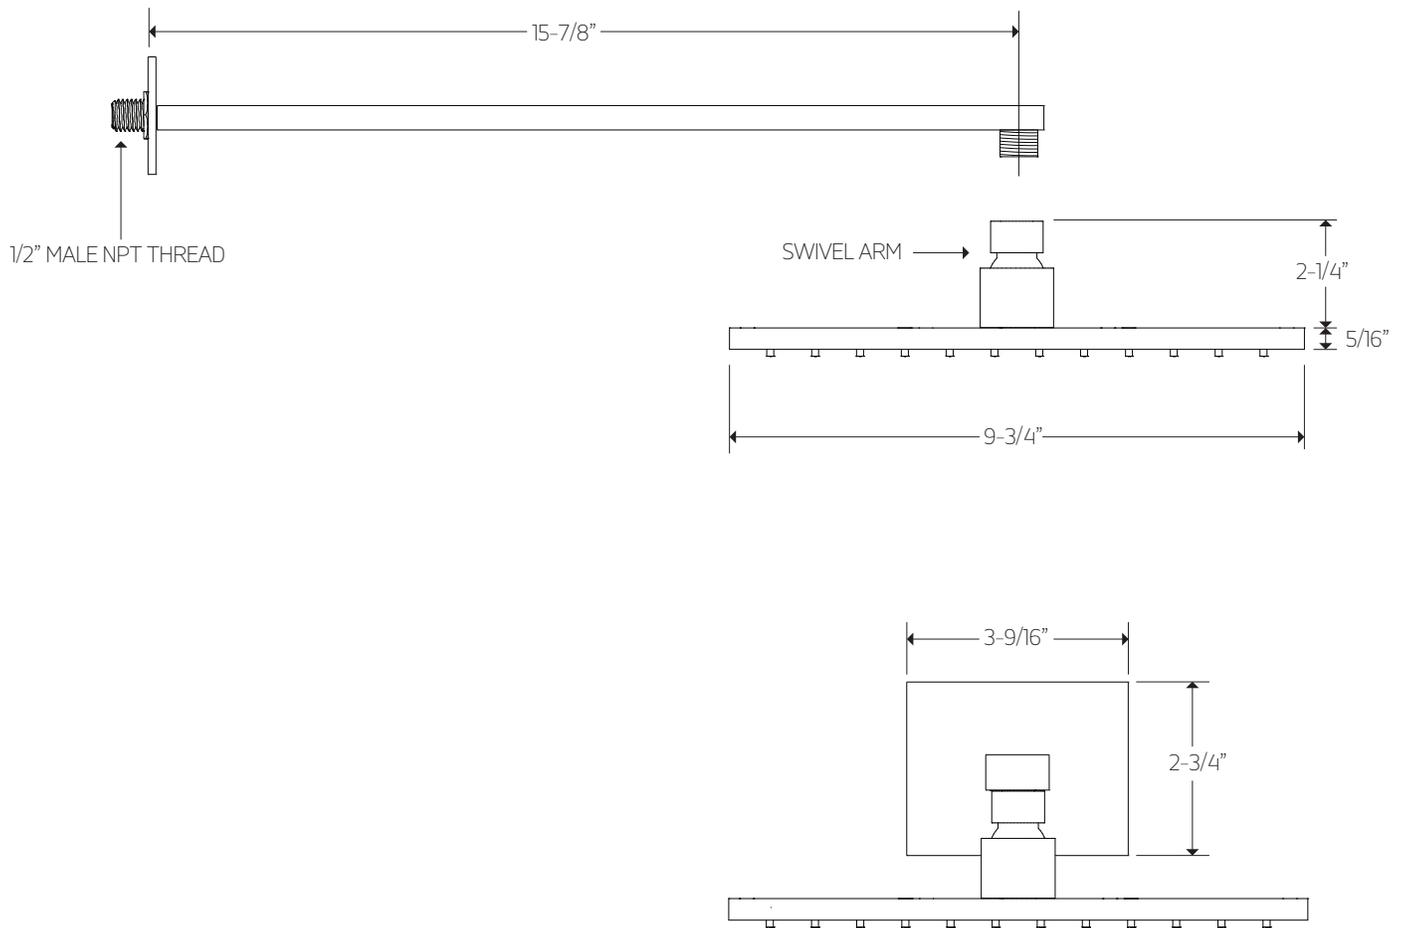

# artos<sup>®</sup>

PS143

## PRODUCT DIMENSIONS

premier series shower set

for tub filler

