artos

PS144

premier series shower set





FEATURES

Solid Brass 2-Outlets

INCLUDES F903B-58TK F907-60 F908-4

OPERATING PRESSURE Minimum: 15 psi Maximum: 75 psi Above 90psi it may be necessary to install a pressure reducer

OPERATING TEMPERATURE Maximum: 176°

FLOW CAPACITY Shower Head: 1.8 USGPM Tub Filler: 6.0 USGPM

APPROVAL



WESTOVER, INC13305 B STREET OMAHA, NEBRASKA 68144WWW.ARTOS.US.COMT:877.927.8679

All technical and pricing information is subject to change without prior notice. To confirm accuracy check with Artos customer service.

OPERATING SPECIFICATIONS


artos

PS144

premier series shower set

PRODUCT DIMENSIONS

for trim kit

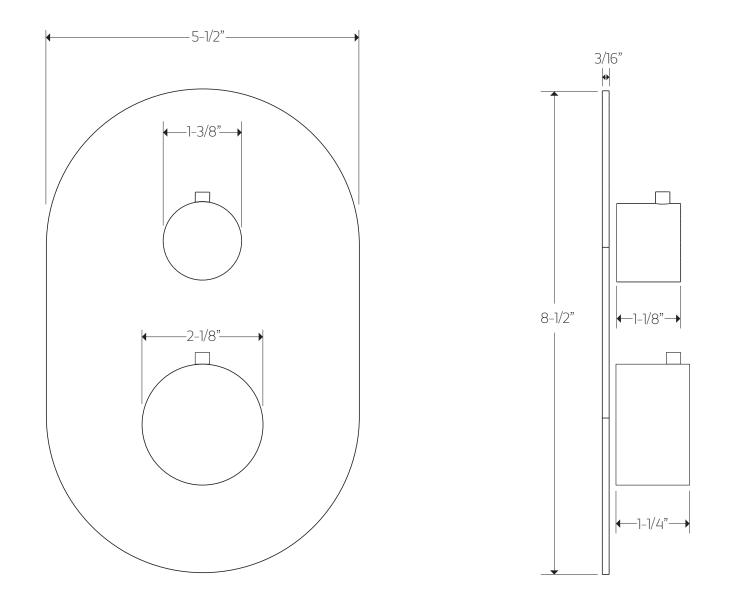


artos

PS144

premier series shower set

PRODUCT DIMENSIONS

for shower head

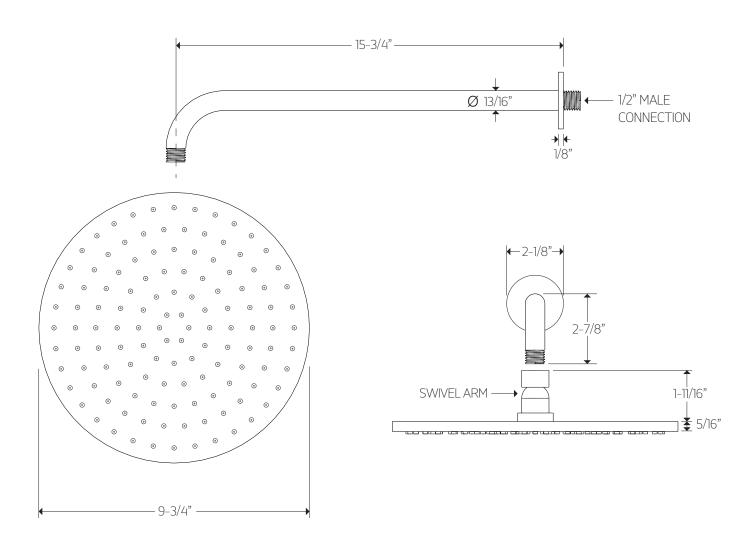

All technical and pricing information is subject to change without prior notice. To confirm accuracy check with Artos customer service.

artos®

PS144

premier series shower set

PRODUCT DIMENSIONS

for tub filler

