


# artos<sup>®</sup>

## PS146

## OPERATING SPECIFICATIONS

premier series shower set



### FEATURES

Solid Brass  
3-Outlets

### INCLUDES

F703-13  
F702-3  
F903B-55

### OPERATING PRESSURE

Minimum: 15 psi  
Maximum: 75 psi  
Above 90psi it may be necessary to install a pressure reducer

### OPERATING TEMPERATURE

Maximum: 176°

### FLOW CAPACITY

Shower Head: 1.8 USGPM  
Tub Filler: 6.1 USGPM

### F901-8 & F902-14 APPROVAL





# artos<sup>®</sup>

PS146

## PRODUCT DIMENSIONS

premier series shower set

for trim kit

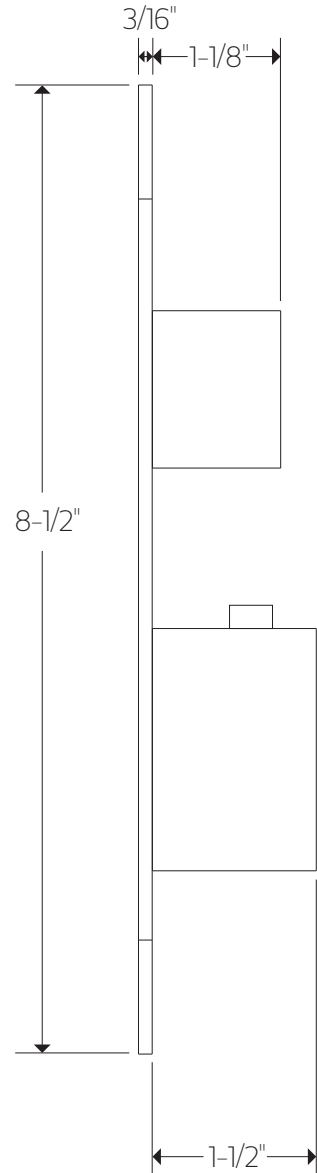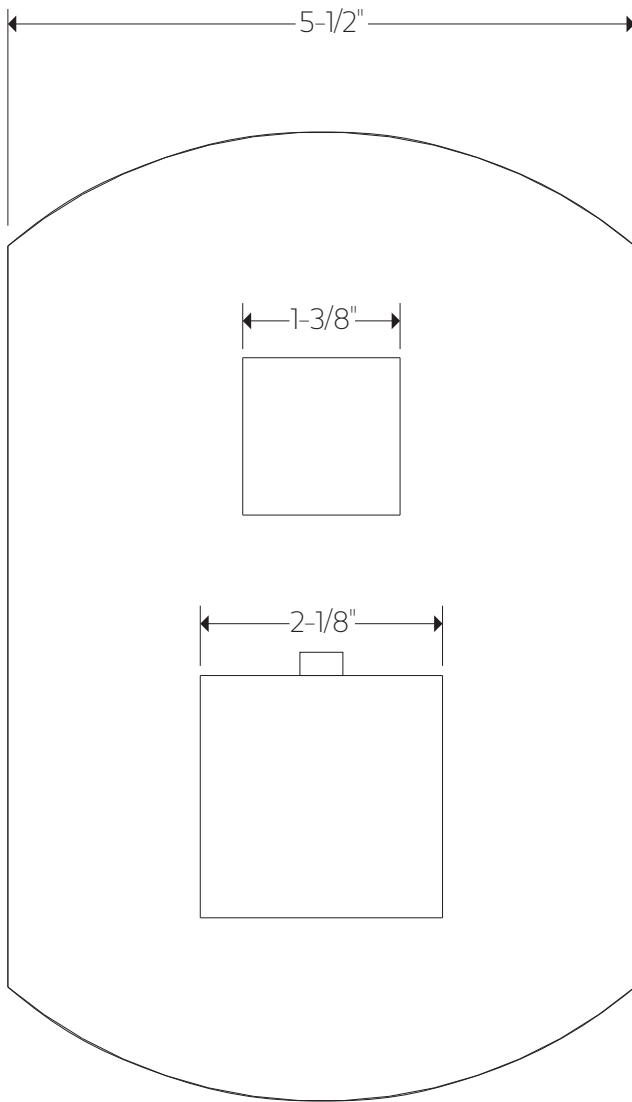


# artos<sup>®</sup>

## PS146

premier series shower set

## PRODUCT DIMENSIONS

for shower head

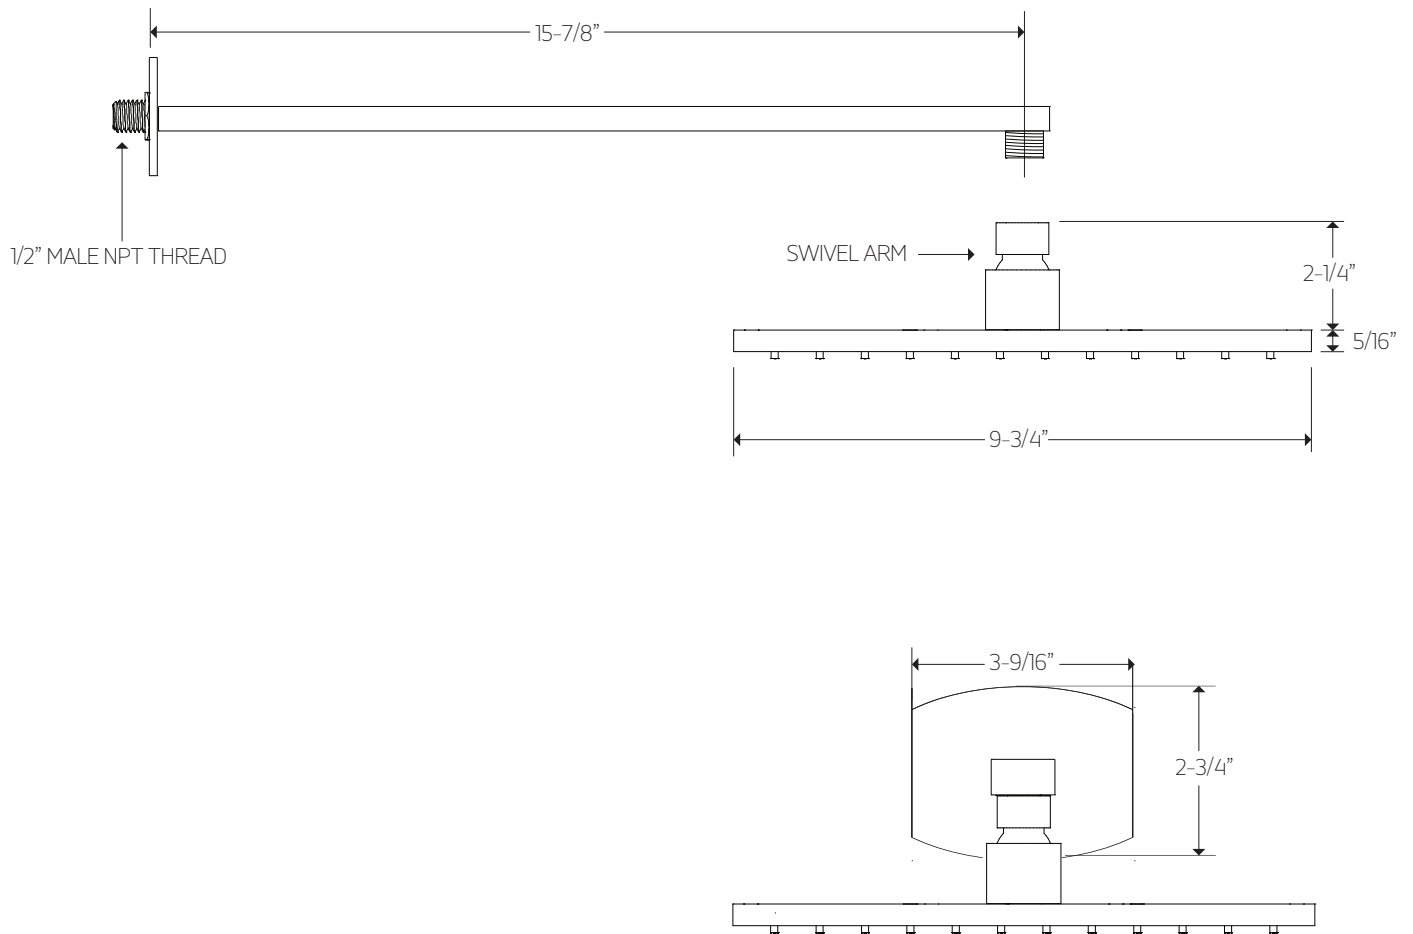

# artos<sup>®</sup>

PS146

## PRODUCT DIMENSIONS

premier series shower set

for tub filler

