



California Faucets®

TRADITIONAL SINGLE HANDLE COMBO WATER DISPENSER

KITCHEN

Features

- Over 28 finishes including 13 PVD finishes
- All brass construction
- Insulated body & spout to reduce heat to faucet
- Self-closing for hot water
- Max flow rate: 0.5 gpm (1.9 L/min); may vary based on hot water tank used
- Requires Hot Water Tank (9628SS); sold separately
- Faucet is **not** compatible with RO filter units

Codes/Standards Applicable

Meets or exceeds the following at date of manufacture:

- ASME A112.18.1/CSA B125.1
- NSF 61 and NSF 372
- CEC & DOE
- Commonwealth of MA
- ADA compliant

9623-K10-XX



(9623-K10-33 shown)




XX = DENOTES HANDLE SHOWN

THROUGH-HOLE SPECIFICATIONS

MIN	RECOMMENDED	MAX
Ø1-1/4" [32mm]	Ø1-3/8" [35mm]	Ø1-5/8" [41mm]

DIMENSIONS		
XX HDL	A	B
33	7 4/8" [124mm]	2" [51mm]
35	7 4/8" [124mm]	2" [51mm]
40	5" [127mm]	2 1/16" [52mm]
42	7 4/8" [124mm]	2" [51mm]
48	7 4/8" [124mm]	2" [51mm]
55	5" [127mm]	2 1/16" [52mm]
64	5 1/8" [130mm]	2 1/8" [54mm]

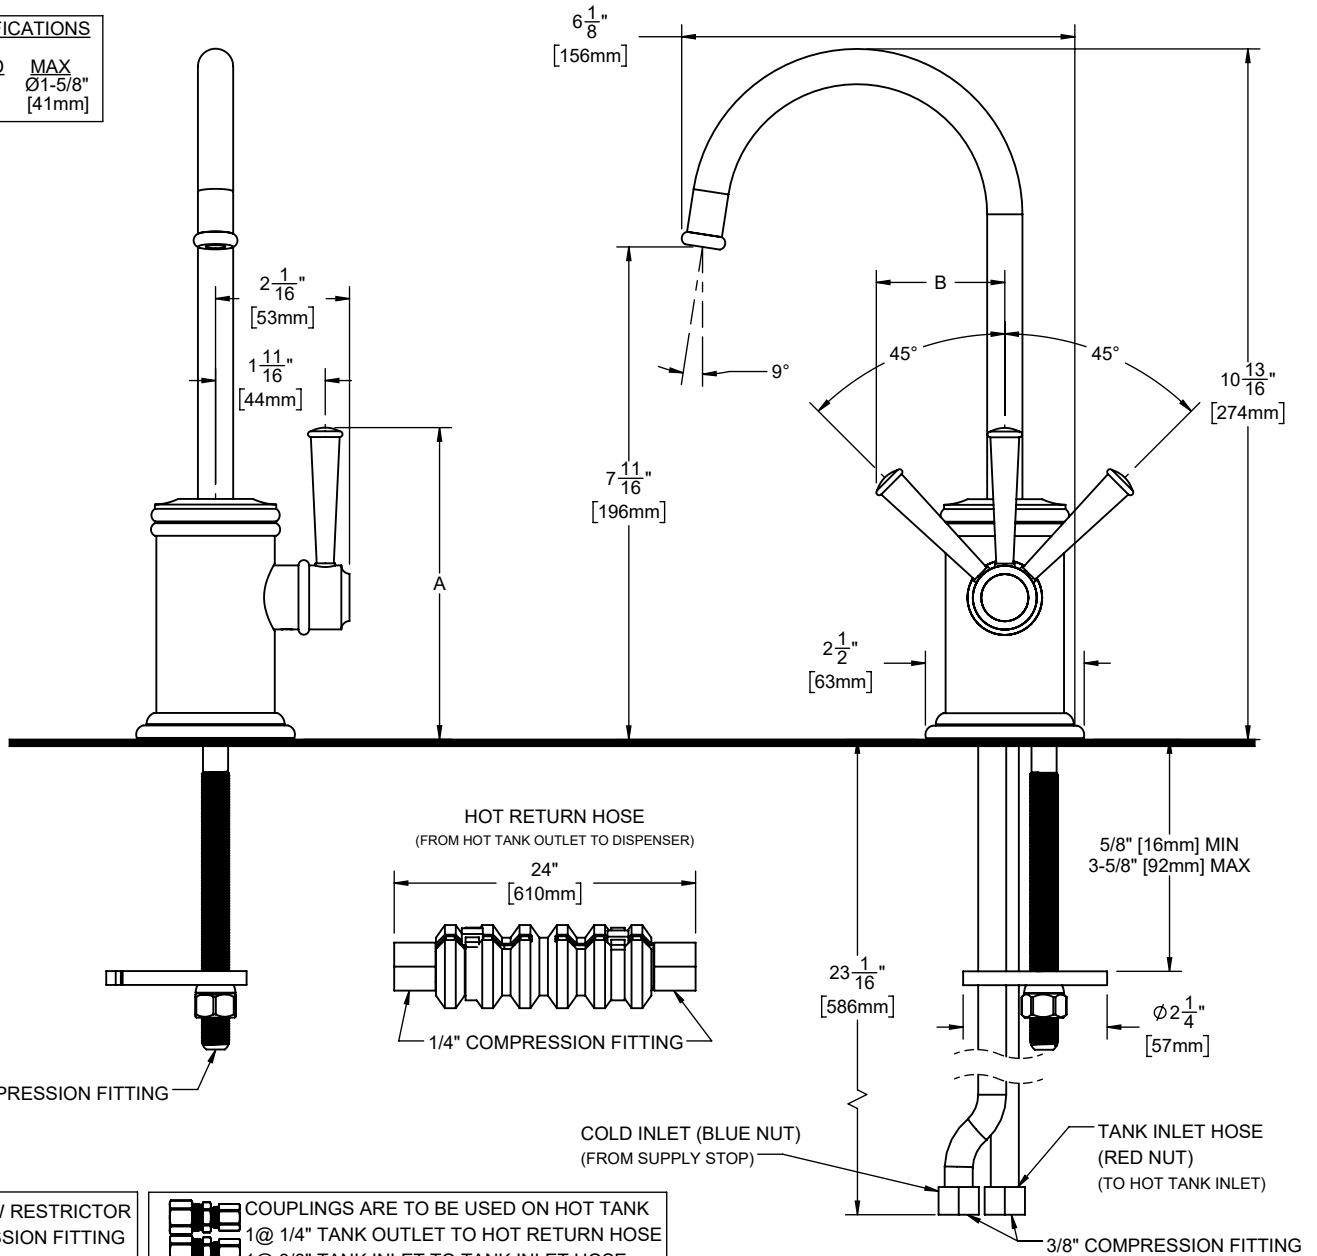

SUPPLY LINE FLOW RESTRICTOR FOR 3/8" COMPRESSION FITTING
9/16"-24 MALE X FEMALE

COUPLINGS ARE TO BE USED ON HOT TANK
1@ 1/4" TANK OUTLET TO HOT RETURN HOSE
1@ 3/8" TANK INLET TO TANK INLET HOSE

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ALL DIMENSIONS SHOWN TO NEAREST 1/16"
[ALL DIMENSIONS SHOWN TO NEAREST 1mm]