

### Features

- Includes tamper resistant locking nut to prevent accidental misadjustment.
- Built-in check valves prevent migration of hot water to cold and cold water to hot water piping.
- Provided with cap for three port application.
- Integral strainer with 40 mesh stainless steel screens to filter.

### Material

- Lead Free\* Brass body construction.

### Installation

- Installs easily between the stop valves and faucet.




### Codes/Standards

ASSE 1070  
NSF/ANSI 61  
NSF/ANSI 372

### KOHLER<sup>®</sup> One-Year Limited Warranty

See website for detailed warranty information.

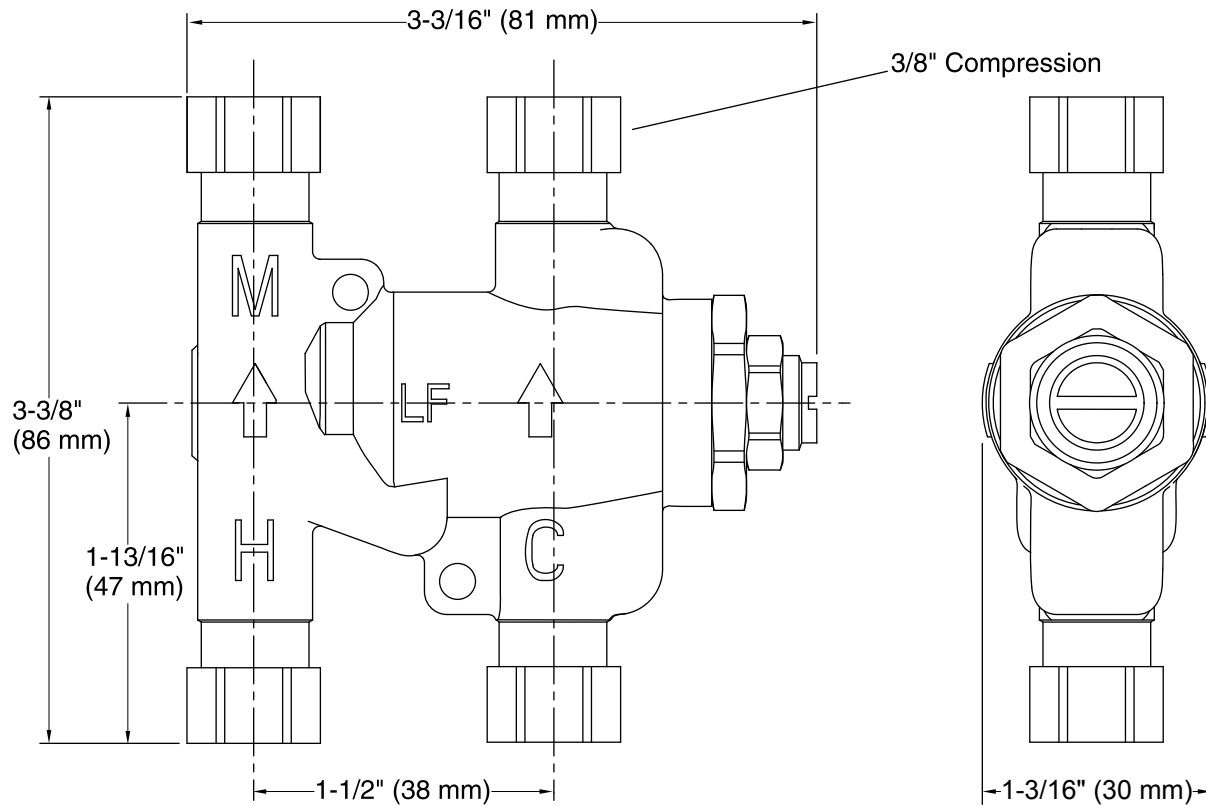

### Technical Information

All product dimensions are nominal.

#### Faucet:

Flow rate: 0.5 gal/min (1.9 l/min)  
 Pressure: 60 psi (4.1 bar)  
 Valve body: Cast brass  
 Drain included: No

### Notes

Install this product according to the installation guide.